



Prepared exclusively for: **Kristie Fowler**

Prepared by: Trisha Boston
trisha.dodd@subzero.com





36" Built-In All Refrigerator

In a dual installation with all freezer model BI-36F, the all refrigerator model BI-36R offers maximum refrigeration capacity. The new air purification system continuously scrubs odors, bacteria, ethylene gas and contaminants to keep food fresh. Framed, overlay, flush inset and stainless steel design options are available. The flush inset installation option allows the unit to sit flush with surrounding cabinetry. Model BI-36R is ENERGY STAR® qualified.



Stainless steel models BI-36R and BI-36F shown with tubular handles.

FEATURES

- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- Air purification system reduces odors, bacteria, viruses and ethylene gas.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable spill-proof glass shelves, door shelves and dairy compartment.
- Soft-close crisper and deli drawers form a lower temperature zone ideal for produce and meats.
- Easy-access flip-up grille.
- Informational freshness cards.

MODEL OPTIONS

	BI-36R/O	BI-36R/S/TH	BI-36R/S/PH
Design	Overlay/Framed/Flush Inset	Stainless	Stainless
Grille	Panel	Stainless	Stainless
Handle	*	Tubular	Pro

**Handle not included to allow for design flexibility.*

INTERIOR FEATURES

- **Refrigerator**
23.3 cu ft Capacity
Air Purification System
4 Adjustable Glass Shelves
1 Stationary Glass Shelf
1 High-Humidity Drawer with Dividers
2 Storage Drawers with Dividers
3 Adjustable Door Shelves
2 Stationary Door Shelves
Adjustable Dairy Compartment

ACCESSORIES

- Grilles for 83" or 88" finished height (84" is standard).
- Framed front panel in white or stainless steel.
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handle.
- Custom front panel mounting kit.
- Dual installation kit with or without dual wide grille, 84" finished height.
- Side panel in white or stainless steel.
- Stainless steel kickplate.
- Framed grille insert and full-length handle.
- Stainless steel tubular and pro handles.
- Dozen egg container.
- Replacement air purification cartridge.
- Retrofit kit for 600 series panels.
- 90° door stop.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.



Flip-up grille.




Air purification system.





36" Built-In All Refrigerator

OVERALL DIMENSIONS

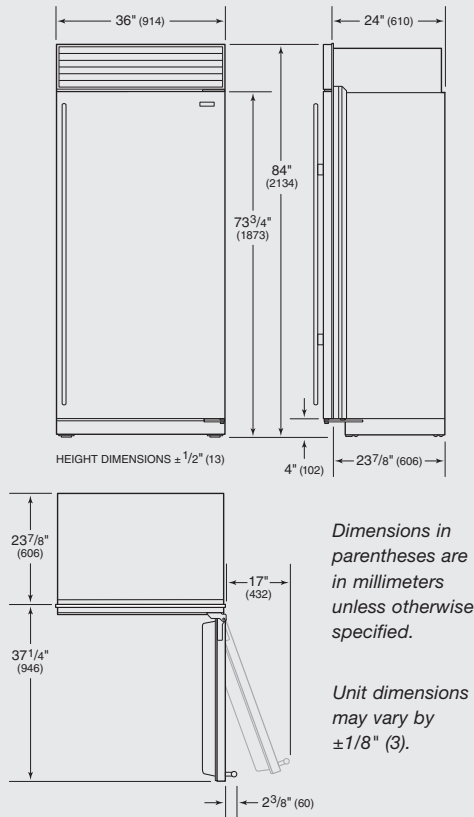

SPECIFICATIONS

Overall Dimensions	36"W x 84" H x 24" D
Door Clearance	Standard 37 1/4" Flush Inset 37 3/4"
Opening Width	35 1/2"
Flush Inset Width	38"
Opening Height	83 3/4"
Flush Inset Height	84"
Opening Depth	24"
Flush Inset Depth	26 3/16"
Electrical Requirements	115 V AC, 60 Hz 15 amp circuit
Shipping Weight	420 lbs


INSTALLATION NOTES

Built-In models may be used in a standard installation or in a flush inset installation which allows the unit to be flush with surrounding cabinetry.


Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

INSTALLATION SPECIFICATIONS

Standard Installation


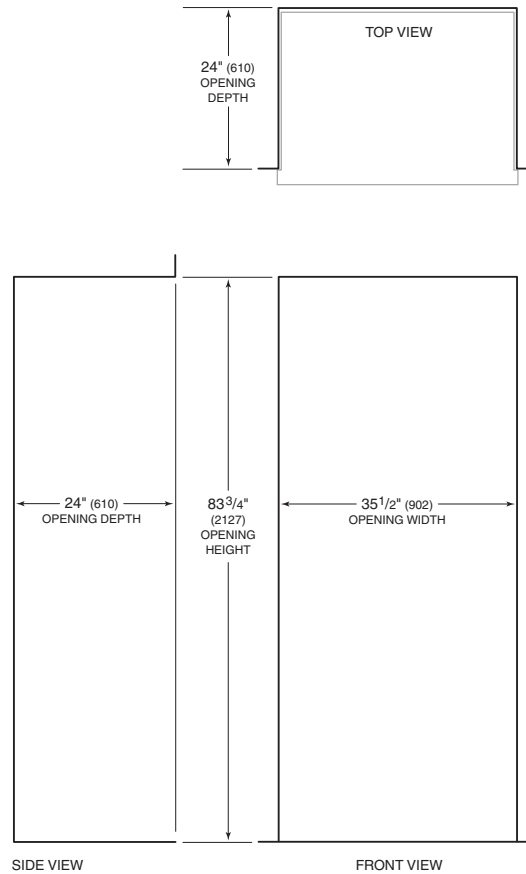


Location of Electrical Supply




Flush Inset Installation

IMPORTANT NOTE:
Dimensions assume a 3/4" (19) panel thickness.

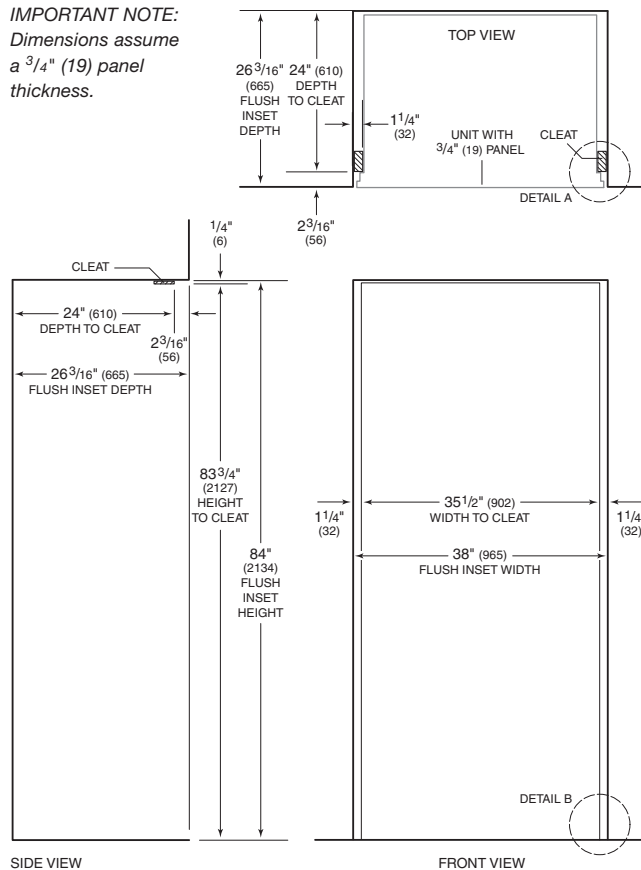

Detail A



Detail B



36" Built-In All Freezer

In a dual installation with all refrigerator model BI-36R, the all freezer model BI-36F offers maximum refrigeration capacity. Framed, overlay, flush inset and stainless steel design options are available. The flush inset installation option allows the unit to sit flush with surrounding cabinetry. Model BI-36F is ENERGY STAR® qualified.



Stainless steel models BI-36F and BI-36R shown with tubular handles.

FEATURES

- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- Advanced water filtration system.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable wire shelves and door shelves.
- Soft-close glide system on storage drawers.
- Easy-access flip-up grille.
- Max ice feature increases production for a 24-hour period.

MODEL OPTIONS

MODEL OPTIONS	BI-36F/O	BI-36F/S/TH	BI-36F/S/PH
Design	Overlay/Framed/Flush Inset	Stainless	Stainless
Grille	Panel	Stainless	Stainless
Handle	*	Tubular	Pro

*Handle not included to allow for design flexibility.

INTERIOR FEATURES

- **Freezer**
 - 22.8 cu ft Capacity
 - Water Filtration System
 - Automatic Ice Maker
 - 3 Adjustable Wire Shelves
 - 1 Stationary Glass Shelf
 - 3 Storage Drawers with Dividers
 - 3 Adjustable Door Shelves
 - 2 Stationary Door Shelves

ACCESSORIES

- Grilles for 83" or 88" finished height (84" is standard).
- Framed front panel in white or stainless steel.
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handle.
- Dual installation kit with or without dual wide grille, 84" finished height.
- Custom front panel mounting kit.
- Side panel in white or stainless steel.
- Stainless steel kickplate.
- Framed grille insert and full-length handle.
- Stainless steel tubular and pro handles.
- Replacement water filter.
- Retrofit kit for 600 series panels.
- 90° door stop.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.



Flip-up grille.




Low profile hinges.





36" Built-In All Freezer

OVERALL DIMENSIONS

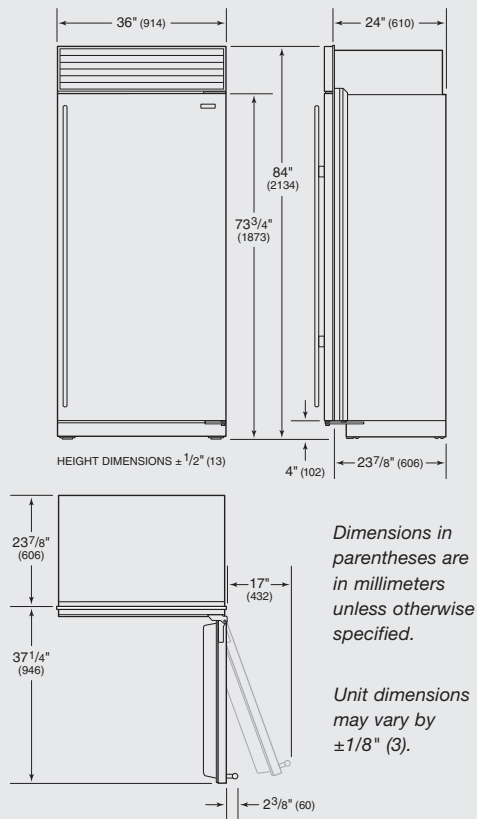

SPECIFICATIONS

Overall Dimensions	36"W x 84" H x 24" D
Door Clearance	Standard 37 1/4" Flush Inset 37 3/4"
Opening Width	35 1/2"
Flush Inset Width	38"
Opening Height	83 3/4"
Flush Inset Height	84"
Opening Depth	24"
Flush Inset Depth	26 3/16"
Electrical Requirements	115 V AC, 60 Hz 15 amp circuit
Plumbing Requirements	1/4" OD copper, braided stainless steel or PEX tubing 35–120 psi
Shipping Weight	406 lbs


INSTALLATION NOTES

Built-In models may be used in a standard installation or in a flush inset installation which allows the unit to be flush with surrounding cabinetry.


Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

INSTALLATION SPECIFICATIONS


Standard Installation

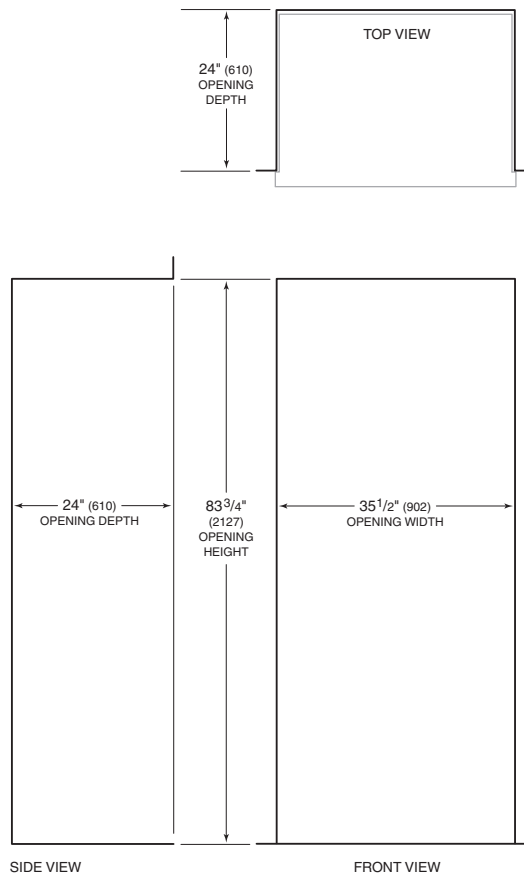


Location of Electrical Supply



Location of Water Supply—Rear





Location of Water Supply—Bottom




Flush Inset Installation

IMPORTANT NOTE:
Dimensions assume a 3/4 inch (19) panel thickness.

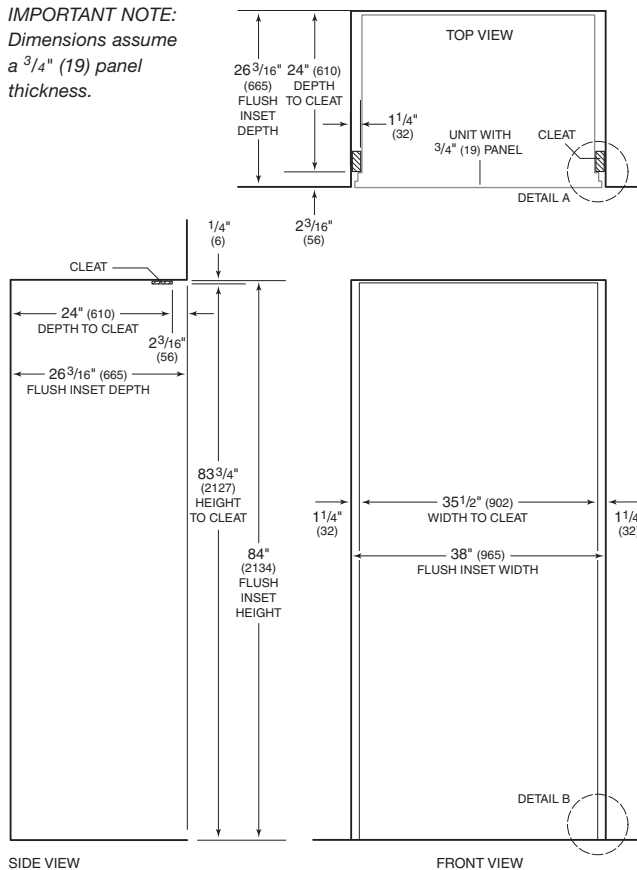

Detail A



Detail B



36" Dual Fuel Ranges

Wolf dual fuel ranges offer a variety of top configurations and standard dual-stacked sealed surface burners. The optional infrared charbroiler and infrared griddle give you the freedom to customize your range. The large electric oven features ten cooking modes and the Wolf exclusive dual convection system that delivers even temperature and airflow throughout. Dual fuel ranges are available in natural or LP gas.



Model DF366 shown.



Model DF366



Model DF364C




Model DF364G

FEATURES

- Stainless steel exterior finish with island trim included.
- Red, black or stainless steel control knobs (specify with range).
- Stainless steel bezels surround all knobs.
- Dual-stacked, sealed burners, all with simmer capabilities and automatic reignition at all settings.
- Melt feature on 9,200 Btu burner.
- Ten cooking modes, temperature probe and self-clean features.
- Porcelain-coated cast iron continuous top grates.
- Pivoting hidden touch control panel.
- Coaxial temperature displaying oven selector knob.
- Cobalt blue porcelain oven interior with halogen lighting.
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard.
- Hidden bake element and recessed broil element.
- Spring/damper door hinge system.



Rotating control panel.



Cobalt blue oven interior.

SURFACE FEATURES

Model	DF366	DF364C	DF364G
Surface Burners			
15,000 Btu high / 950 Btu simmer	5	3	3
Surface Burner			
9,200 Btu high / 325 Btu simmer	1	1	1
Infrared Charbroiler – 16,000 Btu		•	
Infrared Griddle – 15,000 Btu			•

Model numbers are for natural gas dual fuel ranges, add (-LP) to the model number for LP gas.

ACCESSORIES

- Stainless steel risers in 5" and 10" heights, or 20" riser with shelf.
- Red, black or stainless steel control knobs.
- Chrome or brass bezels.
- One piece porcelain-cast wok grate and single burner grate.
- Porcelain-cast two-burner S-grate.
- Set of three standard oven racks.
- One full-extension easy glide rack.
- Broiler pan and temperature probe.
- Hardwood cutting board (griddle model only).
- Bake stone kit.
- Dehydration kit.
- Griddle cleaning kit.

- Front leg extension covers and rear caster covers.
- High altitude conversion kits.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.




This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.



36" Dual Fuel Ranges

OVERALL DIMENSIONS

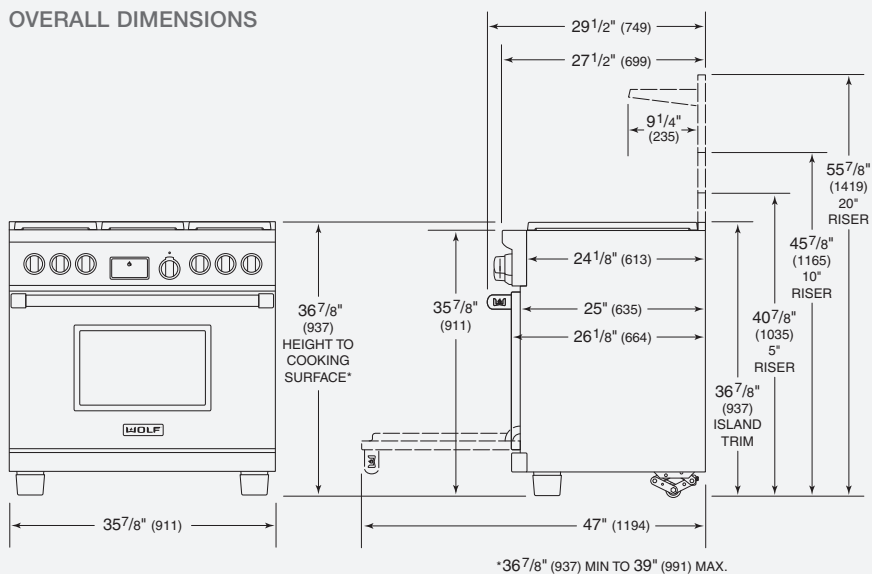


Unit dimensions may vary by $\pm 1/8"$.

SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Width	35 7/8"
Overall Height (to cooking surface)	36 7/8"
Overall Depth	29 1/2"
Oven Interior Capacity	5.4 cu ft
Oven Interior Dimensions	30" W x 16 1/2" H x 19" D
Opening Width	36"
Opening Height (to countertop)	36"
Opening Depth	24"
Electrical Requirements	240/208 V AC 60 Hz, 30 amp circuit
Electrical Rating	5.2 kW at 240 V AC 4.5 kW at 208 V AC
Total Amps	21.7
Shipping Weight	445-470 lbs

INSTALLATION SPECIFICATIONS

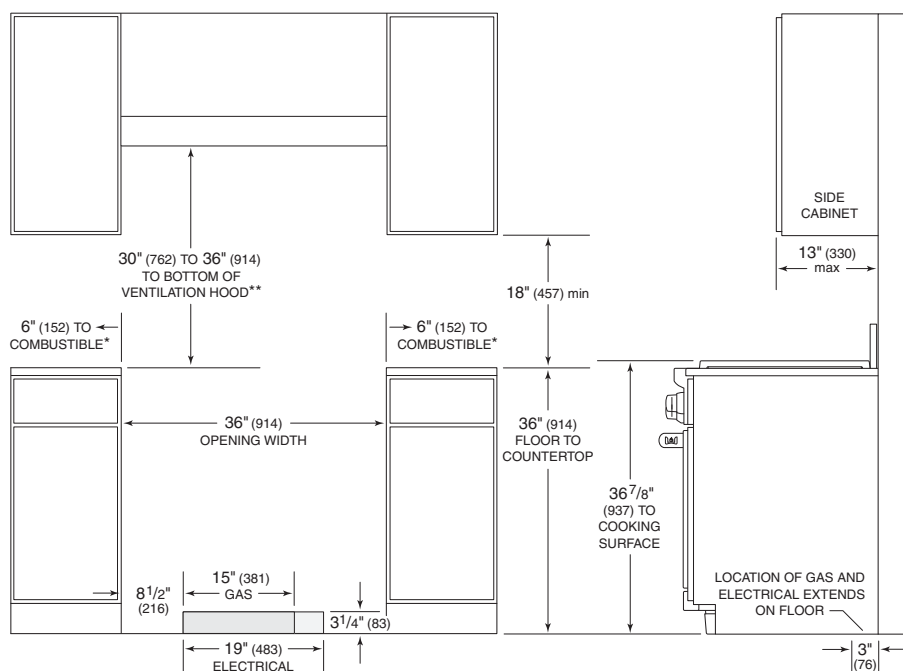

INSTALLATION NOTES

- A riser is required for installations against a combustible surface.
- A Wolf pro wall, chimney, island ventilation hood or hood liner is recommended.
- High altitude conversion kit for LP gas installations above 8,600'. For natural gas above 10,250', contact Wolf customer service.

Dimensions in parentheses are in millimeters unless otherwise specified.



27" Wine Storage with Bulk Storage Drawers

Better wine storage conditions for the bottle ultimately means better enjoyment in the glass. Model 427RG has a wine storage capacity of 78 (750 ml) bottles and offers two bulk storage drawers for wine, soda, beer and snacks. Three independent storage zones maintain ideal temperature and humidity. The integrated design allows the unit to merge seamlessly into the décor.



Model 427RG installed next to model 736TCL integrated refrigerator/freezer.

FEATURES

- Upper cabinet wine storage and two bulk storage drawers.
- Custom front panels and hardware allow for infinite design options.
- Integrated design allows for dual installation with integrated unit.
- Individual temperature control of two separate wine storage compartments.
- Maintains ideal storing and serving temperature for all wines, humidity and UV protection.
- Wine storage temperature zones range from 39°F to 65°F—refrigerator drawers from 34°F to 45°F.
- Full-view, UV-resistant glass door—high altitude glass available.
- Illuminated touch control panel.
- Discreet cabinet interior lighting.
- Wine shelves accommodate 750 ml bottles, half-bottles and magnums.
- Roller-glide wine shelves with natural cherrywood facing have three-quarter extension for easy access.
- Illuminated display shelf for prized bottles of wine.
- Can be connected to home security system.
- Star-K compliant with installation of a harness kit.

ACCESSORIES

- Stainless steel front panels with tubular or pro handles—80" or 84" finished height.
- Stainless steel tubular and pro handles.
- Dual installation kits for installation with integrated column, tall or drawer model.
- Door lock.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

ENEMIES OF WINE

Heat – Three independent storage zones can be set in a range of 39°F to 65°F, with one-degree digital accuracy.

Light – UV resistant bronze tinted glass shields wines from harmful rays.

Humidity – Three evaporators, one for each storage zone, maintain steady, moderate humidity.

Vibration – Sub-Zero's quiet compressors let wines rest undisturbed. Shelves glide out smoothly, providing access without agitating the wine.



For additional information on the enemies of wine, visit www.subzerowine.com.





27" Wine Storage with Bulk Storage Drawers

OVERALL DIMENSIONS

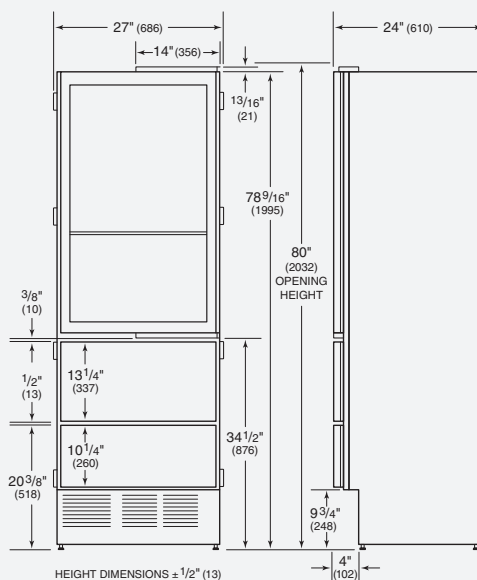

Overall dimensions do not include panels or handles.

Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS



Overall Width	27"
Overall Height	80"
Overall Depth	24"
Door Clearance	25 1/2"
Wine Storage Capacity	78 bottles*
Bulk Storage Capacity	5.3 cu ft
Opening Width	27"
Opening Height	80"
Opening Depth	25"
Electrical Requirements	115 V AC, 60 Hz 15 amp dedicated circuit
Shipping Weight	410 lbs

*750 ml bottles.

**Depth is 24" from the front of the unit to its back. Your design may necessitate moving the unit back, or cabinets forward to achieve a flush fit. This will require a minimum opening depth of 25".

INSTALLATION SPECIFICATIONS

Opening Dimensions

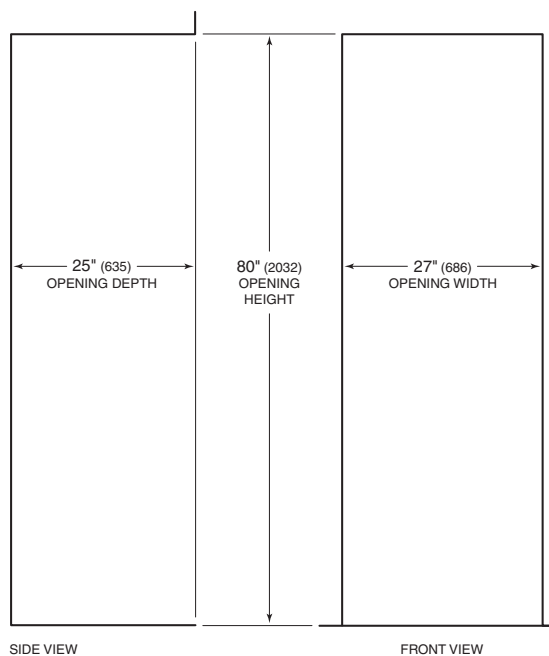


Dimensions in parentheses are in millimeters unless otherwise specified.

INSTALLATION NOTES

Stainless steel panels with handles are available as accessories. Panels can be ordered to include a lock. These panels are not installed at the factory.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

Location of Electrical Supply





Convection Steam Oven

Delivering precise control is easy with a variety of steam, convection, and combination steam and convection cooking options. Unique technology senses the amount, size, and shape of food once an automatic mode has been selected. While cooking, it monitors the time, temperature, and environment, eliminating all guesswork in the kitchen. Virtually any dish prepared in a conventional oven, range or microwave can also be prepared in the Wolf convection steam oven.



Model CSO24.

FEATURES

- Stainless steel with tubular handle.
- Can be installed in a standard or flush inset application.
- Stainless steel trim to match L series and E series ovens.
- Convection with twelve cooking modes: steam, reheat, auto steam bake, convection, convection humid, convection steam, Wolf gourmet, slow roast, recipes, my recipes, keep warm, descale and cleanse.
- Four-level rack guides with two adjustable oven racks.
- One perforated 17³/₄" x 1" x 15" stainless steel pan.
- One solid 17³/₄" x 1" x 15" stainless steel pan.
- Large viewing window and halogen interior lighting.
- Temperature probe.
- Water tank with lid.
- Recipes mode.
- Delayed start feature and descaling program.
- Agency certified for US and Canada.

ACCESSORIES

- 30" (762) L and E series stainless steel trim—framed and unframed.
- Perforated stainless steel pans—12³/₄" x 1¹/₂" x 7" and 12³/₄" x 2¹/₂" x 7".
- Solid stainless steel pans—12³/₄" x 1¹/₂" x 7" and 12³/₄" x 1¹/₄" x 14".
- Oven rack.
- Descaling solution.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

BENEFITS OF CONVECTION STEAM

- Moistness and flavor are retained so no additional oil, basting or sauces are necessary.
- Vitamins, texture, shape, size and color are preserved.
- Risks of overcooking are reduced and messy boilovers eliminated.
- Breads, bagels, bakery and pastry can be proofed, baked and crisped with steam.
- Meats defrost gently and evenly without any hot spots.
- In Wolf gourmet mode, a sensor automatically adjusts cooking time to the type and amount of food being cooked, preventing under- or overcooking.
- Smart timer functions are like an extra pair of hands, cooking food that's ready to serve when you need it—even when you're not in the kitchen to start and stop the oven.




Model CSO24 interior.



Convection Steam Oven

OVERALL DIMENSIONS

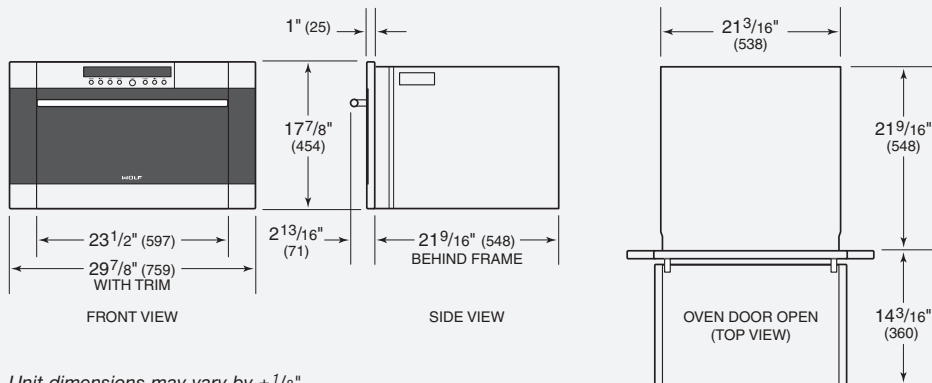


Unit dimensions may vary by $\pm 1/8"$.

SPECIFICATIONS

Overall Width	23 1/2"
Overall Width with 30" Trim	29 7/8"
Overall Height	17 7/8"
Overall Depth	22 9/16"
Interior Capacity	1.8 cu ft
Interior Dimensions	17 7/8" W x 11" H x 15 3/4" D
Power	3800 W
Electrical Requirements	240/208 V AC 60 Hz, 20 amp circuit
Power Cord	6' cord with grounded plug
Shipping Weight	80 lbs


INSTALLATION SPECIFICATIONS

Standard Installation

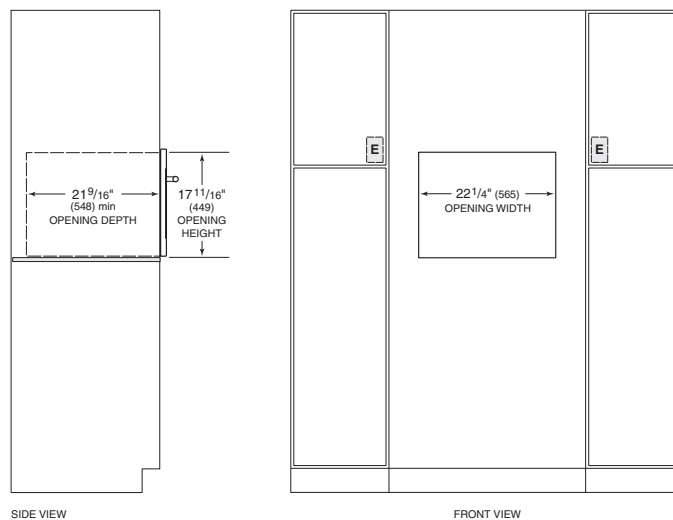

NOTES: Minimum base support 100 lbs (45 kg).
Electrical supply must be located in adjacent cabinet within 3' (.9 m) of opening.
Dashed line represents profile of unit.

Flush Inset Installation

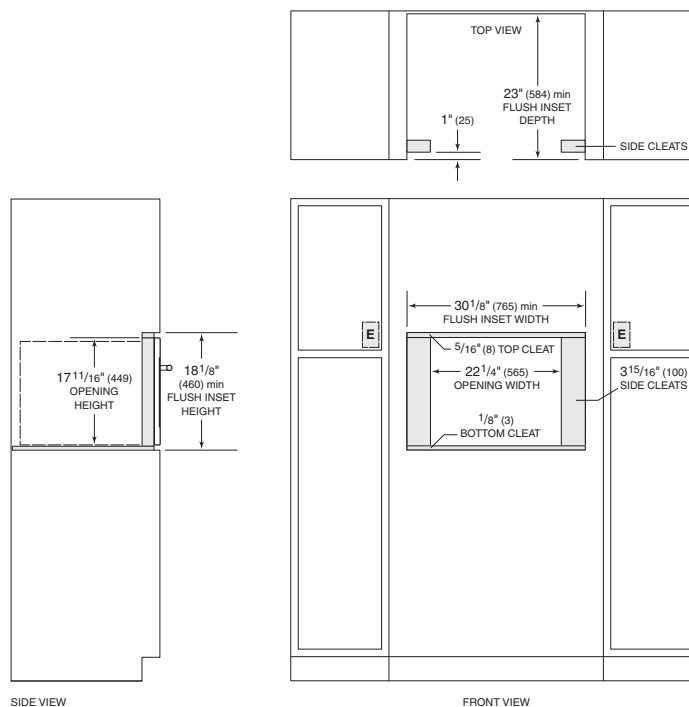

NOTES: Minimum base support 100 lbs (45 kg).
Electrical supply must be located in adjacent cabinet within 3' (.9 m) of opening.
Cleats may be visible and should be finished to match cabinetry.
Dashed line represents profile of unit.

INSTALLATION NOTES

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.

PROGRAM EXTENDED
THROUGH MARCH 31, 2013



DREAM KITCHEN EVENT

\$2,500
says we can turn your
dream kitchen into reality.

\$1,000

instant savings when you purchase



PLUS



OR



Any full-size built-in,
integrated, or PRO 48 refrigeration

Any size range (gas or dual fuel) or
any size wall oven with any size rangetop or 30" or 36" cooktop

\$1,500

on up to 3 additional products

\$500 + \$500 + \$500

\$500 savings on each*



ASK A SALES ASSOCIATE FOR DETAILS.
subzerosavings.com

*Applicable to all products excluding microwaves and accessories



Sub-Zero and Wolf Eligible National Consumer Program Products

Purchase One Sub-Zero Full-Size Built-In, Integrated, or PRO 48 Model

Built-In Full-Size Models:

30" Over-and-Under Refrigerator/Freezer	30" Over-and-Under Glass Door Refrigerator/Freezer
36" All Refrigerator	36" Glass Door All Refrigerator
36" All Freezer	36" Over-and-Under Glass Door Refrigerator/Freezer
36" Over-and-Under Refrigerator/Freezer	42" Side-by-Side Refrigerator/Freezer w/Internal Dispenser
36" French Door Refrigerator/Freezer	42" Side-by-Side Refrigerator/Freezer w/Dispenser
36" Side-by-Side Refrigerator/Freezer	48" Side-by-Side Refrigerator/Freezer
42" Side-by-Side Refrigerator/Freezer	48" Side-by-Side Refrigerator/Freezer w/Internal Dispenser
48" Side-by-Side Refrigerator/Freezer w/Dispenser	

Integrated Full-Size Models:

27" Column All Refrigerator	27" Column All Freezer
27" Tall All Refrigerator w/Bulk Storage Drawers	27" Tall All Freezer w/Bulk Storage Drawers
27" Tall Refrigerator/Freezer w/Bulk Storage Drawers	36" Tall All Refrigerator w/Bulk Storage Drawers
36" Tall All Freezer w/Bulk Storage Drawers	36" Tall Refrigerator/Freezer w/Bulk Storage Drawers

PRO 48 Models:

48" Side-by-Side Solid Door Refrigerator/Freezer	48" Side-by-Side Glass Door Refrigerator/Freezer
--	--

Other Sub-Zero Products That Qualify For Additional \$500 Instant Savings Per Product*

27" Integrated All Refrigerator Drawers	27" Integrated All Freezer Drawers
27" Integrated Refrigerator/Freezer Drawers	15" Indoor or Outdoor Ice makers
24" Undercounter Indoor All Refrigerator	24" Undercounter Outdoor All Refrigerator
24" Undercounter Refrigerator/Freezer	24" Undercounter Beverage Center
15" Wine Storage	24" Wine Storage – Built-In
24" Wine Storage – Freestanding	27" Wine Storage w/Bulk Storage Drawers
27" Wine Storage	30" Wine Storage

Purchase One Wolf Range or a Built-In Oven with Rangetop, 30" or 36" Cooktop or Two 15" Integrated Modules**

Gas or Dual Fuel Range and Sealed Burner Rangetop Models:

30", 36", 48", or 60" Gas Ranges	30", 36", 48", or 60" Dual Fuel Ranges
30", 36", or 48" Sealed Burner Rangetops	

Built-In Ovens:

30" Single or Double E Series Ovens	30" Single or Double or 36" Single L Series Ovens
-------------------------------------	---

Cooktops:

30" or 36" Electric Cooktops	30" or 36" Gas Cooktops
30" or 36" Induction Cooktops	Any Two 15" Integrated Modules**

Other Wolf Products That Qualify For Additional \$500 Instant Savings Per Product*

15" Integrated Electric, Gas, or Induction Cooktops	15" Integrated Fryer, Grill, or Steamer Modules
15" Multi-Function Cooktop	30", 36", 42", or 54" Outdoor Grills
24" Convection Steam Oven	13" Side Burner for Cart
13" Burner Module – Built-In	30" or 36" Cooktop Wall or 42" Cooktop Island Hoods
30" Warming Drawer – Indoor or Outdoor	42" Cooktop Low-Profile Island Hood
30", 36", or 45" Downdrafts	22", 24", or 27" Deep Pro Wall Hoods – All Widths
30", 36", or 45" Cooktop Low-Profile Wall Hoods	Pro Island Hoods or Pro Liners – All Widths
Pro Wall Chimney Hoods – All Widths	

This Sub-Zero, Inc. and Wolf Appliance, Inc. Instant Savings offer is valid beginning October 1, 2012, and expires March 31, 2013, at participating Sub-Zero and Wolf dealers in the United States and Canada. This instant savings will be applied at point of sale only for qualifying purchases. All appliances must be purchased and invoiced at the same time, during the program period, appear on the same invoice, and be delivered by September 30, 2013. Products must be delivered and installed in the country of purchase. The Instant Savings offer cannot be combined with any other offers. Check with your local dealer for details or visit subzerosavings.com.

*Up to a combination of three (3) additional Sub-Zero or Wolf products at \$500 each for a total additional instant savings of \$1,500

**15" Integrated Modules are listed under Other Wolf Products.